

Also the S W cor of the N W gr of said section

Witness trees	White oak 20 S 89 E 89 lbs
Length of section line west of "	White oak 30 S 89 E 84 "
" " " " East "	323 poles 4 lbs
" " " " "	320 " 19 "
Difference	2 Poles 10 lbs

Charles Swearingen } Chain bearers
Isaac Wisenand } Sworn

James Woodburn
Supt Sur. M C

Dec 26th 1853 - Surveyed for John Jones in Section 22 T 8 R 2 W and established the following corners viz the S E corner of S W gr.

Witness trees White oak 30 S 82 W 33 lbs

" " " " 30 N 39 E 44 "

N E corner of S W gr Elm 12 N 30 E 30 "

Pfizer 30 S 8 E 39 "

N W corner of S W gr wit trees B Walnut 6 N 10 E 35 1/2 "

" " 2 N 18 E 14 1/2 "

Andis Smith & Howard Campbell ch br

Dec 28th 1853 - Surveyed for Geo Ellen & Wm Samples & others in Sec 16 T 8 R 2 W and established the following corners viz S W cor of S E gr wit trees Hickory 8 N 40 E 44 lbs

" " Hickory 8 N 89 E 50 lbs

The S W cor of S E gr Walnut 12 N 65 W 65 lbs Sum 24 N 88 E 91 "

" " E 1/2 of N W gr Maple 18 N 53 W 14 lbs Beech 14 S 82 W 18 1/2 "

Layed off 60 acres in the N E cor of S E gr as follows - beginning at the N E corner of said gr running thence South 100 poles to a stone wit trees Beech 4 N 10 W 18 lbs Hick 14 N 75 W 20 lbs Thence West 96 poles to a stone, Thence North 100 poles to a stone wit trees Hick 6 N 75 W 22 lbs Hick 8 N 85 W 28 lbs. Thence East 96 poles to the beginning - John Jones & ch brs

Wm Samples

Dec 29th & 30th Surveyed for Samuel Holmes John Hombaker & c in Sec 9 T 7 R 1 W and established the following corners

N W cor of E 1/2 of N E gr mulberry 100 N 65 W 80 lbs Beech 8 S 30 E 93 "

S W " " " " " Beech 14 S 68 W 101 lbs Beech 20 S 44 E 93 "

S W " " " " " Sugar 12 S 21 W 2 lbs Sugar 6 N 24 W 27 "

N W " " " " " Sugar 10 S 12 W 30 Ash 12 S 30 E 53 "

S W cor of N E gr of S W gr W Walnut 8 N 37 1/2 W 28 lbs Sugar 10 S 85 E 36 "

S E " " " " " Sugar 30 S 92 W 104 lbs Elm 12 N 72 W 109 "

S W cor of E 1/2 of S W gr Sugar 10 N 47 1/2 W 21 lbs Sugar 15 S 70 W 6 "

Samuel Holmes } chain
D Wagerman } bearers

James Woodburn



Dec 6th 1870
 Surveyed the following lot of land
 in Section 12 & Township 22 N. Range
 10 E. range line west for Joseph
 Chambers Joseph Beck and
 Chas Thompson (Chambers)

Length of the line from the South corner
 of Section 12 to the
 western half mile West of the line
 100 Poles & 10 links half of said line
 80 Poles & 5 links

Then began at a stone at the South west corner of the north west
 one fourth of the South west quarter of Section 12 & Town 22 Range
 10 E. 10th East then North 4th & W. 20 Poles to a stone witness trees
 6 inches diameter North 42th & E. 32 links dist. Pole
 3 inches diameter South 64th & E. 124 links dist then East 80 Poles to a
 stone witness trees Sugar 10 inches diameter South 20th & W. 22th links
 Dist Sugar 12 inches diameter South 12th & W. 16th links Dist
 Then South 20 Poles to a stone witness trees Sugar 24 inches diameter
 North 44th & E. 31 links dist then West 20 Poles to the Beginning
 Containing 10 acs

Witness James Alexander Chambers & Samuel
 H. Gerald Savonar

Alexander C. Spencer
 Marshal County Surveyor

CICr_107, 107.75, 108, 109, 107.75, 108

T07N-R01W-09
 12/6/1870
 MCS-LSB2-PG160
 Alexander Spencer

CURRY LAND SURVEYING

Douglas R. Curry
Registered Land Surveyor

328 S. Walnut, Suite 1A


(812) 332-9037

Bloomington, IN 47401

Job #012694

Owner: Ronald A. & Katrina A. Mitchell

Source: Deed Record 418, Page 649A

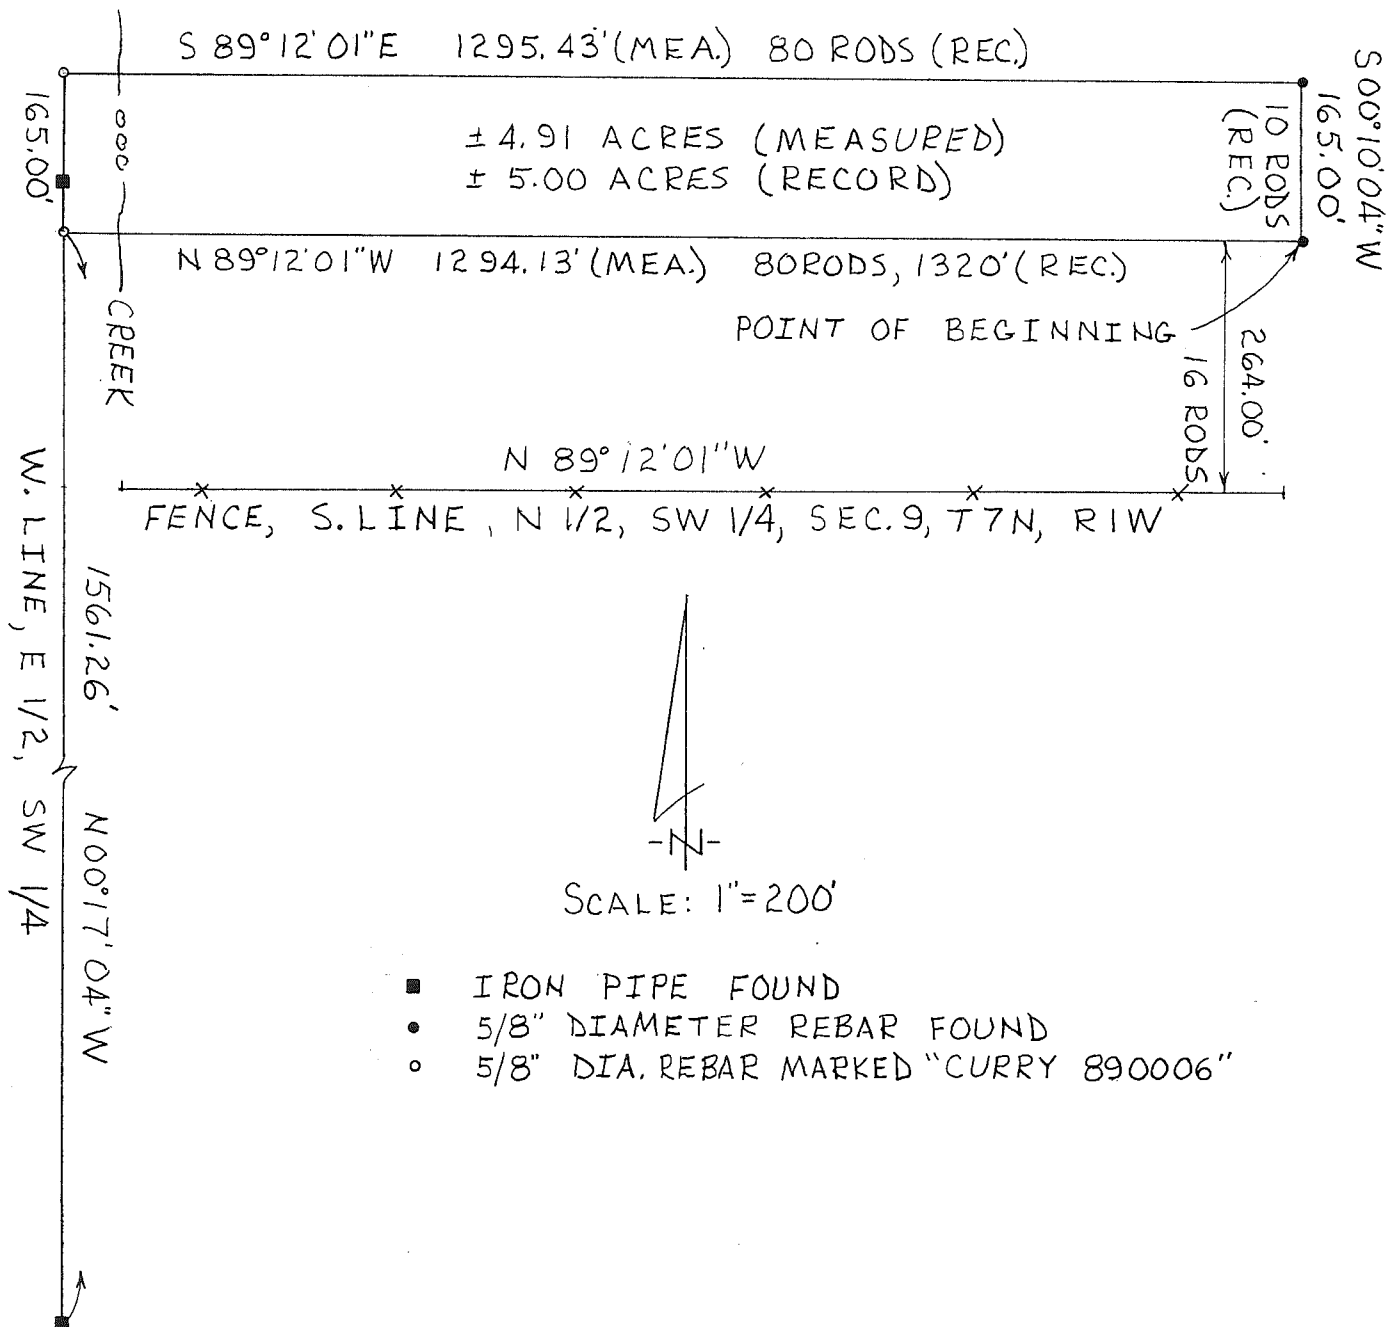

SUBJECT TO ALL EASEMENTS AND RIGHTS-OF-WAY.

Evidence of easements have not been located in the field and are not shown on the survey drawing.


This certification does not take into consideration additional facts an accurate and correct title search and/or examination might disclose.

Subject to the above reservations, I hereby certify that the survey work performed on the project shown hereon was performed by me or under my direct supervision and control, and that all information is true and correct to the best of my knowledge and belief.

Certified this 5th day of February, 1994.

Douglas R. Curry

Douglas R. Curry (Indiana L.S. #890006)

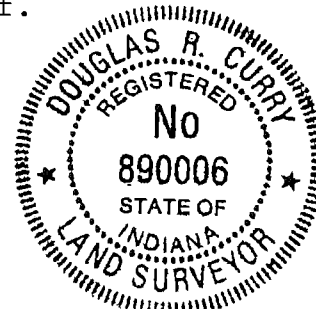

CURRY LAND SURVEYING

Douglas R. Curry
Registered Land Surveyor

328 S. Walnut, Suite 1A

(812) 332-9037

Bloomington, IN 47401

SURVEYOR'S REPORT Job #012694

This report is prepared for Ron Mitchell. This report will explain the survey in more detail with emphasis on the following categories:

- A. availability and condition of reference monuments;
- B. occupation or possession lines;
- C. clarity or ambiguity of the record description and/or adjoiners' descriptions; and
- D. the theoretical uncertainty of the measurements.

A. Monuments used to determine the boundary for the project are described as follows:

Two rebars marking the east boundary line were found in Zikes Road. These two rebars were the correct distance apart and 264 feet north of the fence marking the south line of the quarter quarter. The above mentioned fence was used to determine the location of your south and north boundary line. The west boundary line was determined by locating two iron pipes marking the west line of the east half of the quarter quarter. These iron pipes were set December 14, 1976 by Lee Utt.

B. The fence that runs along the north boundary line is crooked and in one location exists +/- 3 feet south of the line. This location is marked in the field with an orange wire flag.

C. As shown on the drawing, the east to west distance of 80 rods (1320 feet) does not exist. This occurs because your property exists in the NE 1/4 of the SW 1/4 and this 1/4 1/4 measures short. If you do not understand this or want more information, please call because it is easier to explain with pencil and paper instead of words.

D. Care was taken on this survey to meet the classification of a Class C survey. Therefore, all monuments set should be found within the +/- 0.50 foot tolerance of a Class C survey. Source: Title 865 IAC 1.1-12-7.

Douglas R. Curry Feb 5, 1994

Douglas R. Curry
Indiana L.S. #890006